


# BIPOL

## Video Pole Camera PT360

Our high resolution PT-360 pole camera SET offers reliable inspection solutions to security forces, rescue and emergency units, police, special forces and to the industrial sector.

Supplied with 3 cameras, 2 motorized Pan&Tilt cameras and 1 gooseneck camera, it allows inspection of buildings, containers, infrastructures such as bridges, trucks, or industrial sites among others.

2 types of illumination are offered : White LEDs and Infrared 940 NM.

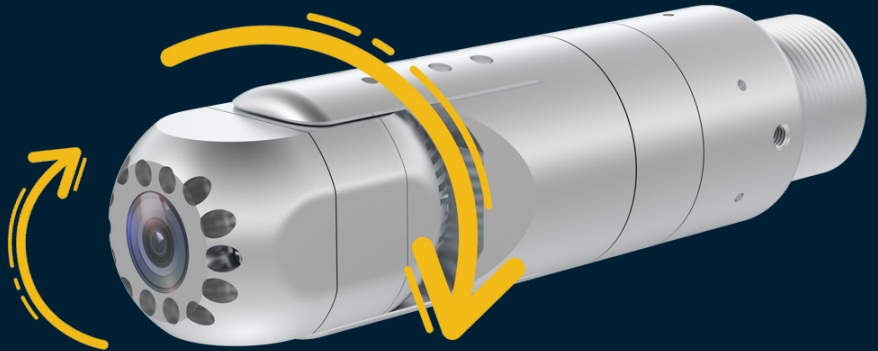

### PAN & TILT CAMERA

360° motorized. White & IR 940nm illumination



### 10.1" Touch Screen

With removable sunshield

### CARBON FIBER POLE

Up to 8.5 meter  
(on request)



# Multiple camera options

## GOOSENECK CAMERA WITH TALK BACK IP65 WHITE LEDS



PT-CTB



## PAN&TILT IP65 CAMERA WITH TALK BACK

White LED / IR (automatic)  
or IR 940 Nm alone



PT-CIP65W  
PT-CIP65IR94

## PAN&TILT IP68 WATERPROOF CAMERA

White LEDs



PT-CIP68W



## TALK BACK FUNCTION WITH HEADSET

Available on IP 65 P&T  
and gooseneck cameras




## CARBON EXTENSION POLE

Extensible from 1.38 m to 5m

# Large 10.1" LCD Touch Screen

All functions easily accessible. Removable  
sunshield for outside work.

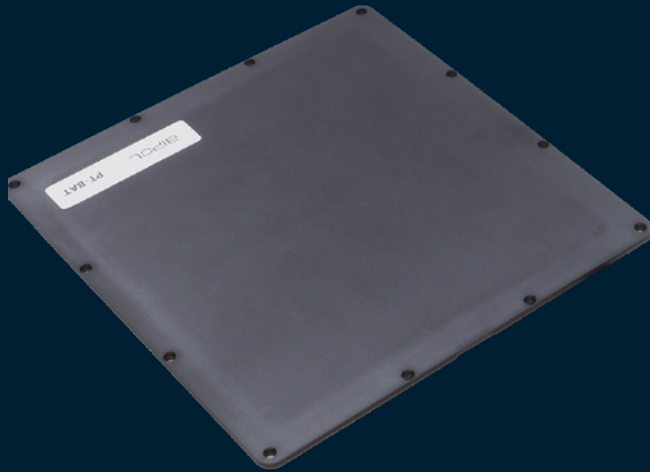

OPTIONAL REMOVABLE  
BATTERY



EXTENSION CABLE FOR  
CAMERA 100M

Shockproof case with  
prints for accessories



## PT Dual Set

1 IP68 P&T camera white LEDs - 1 IP65 P&T camera  
(White LED and IR light) with talk/back - 1  
gooseneck camera with Talk/back - 1 touchscreen  
monitor 10.1" - 1 HDMI cable - 1 removable  
Sunshield - 1 AC charger - 1 Battery pack 55W - 1  
USB Cable - 1 SD Card 64 GB - 1 rugged carrying  
case - 1 instruction manual - 1 cleaning kit BIPOL.

# Technical Data

## IP68 P&T Camera

|                      |                                          |
|----------------------|------------------------------------------|
| Camera Resolution    | 5MP Cmos 2560*1944 PX                    |
| light source         | 12 LEDs                                  |
| Minimum illumination | 0.01Lux/F1.2                             |
| Lens                 | 2.8mm F2.0 134.7°                        |
| PTZ rotate           | Horizontal: 360 ° circular Vertical:180° |
| Dimensons            | Rotating 39x57mm - Total 121 mm          |
| Material             | Stainless Steel                          |

## IP65 P&T Talk-back Camera

|                      |                                          |
|----------------------|------------------------------------------|
| Camera Resolution    | 5MP Cmos 2560*1944 PX                    |
| light source         | 12 LEDs                                  |
| Minimum illumination | 0.01Lux/F1.2                             |
| Lens                 | 2.8mm F2.0 134.7°                        |
| PTZ rotate           | Horizontal: 360 ° circular Vertical:180° |
| Dimensons            | ø39mm ,Length :153mm                     |
| Material             | Black color Aluminum alloy 325g          |

## IP65 Gooseneck Talk-back Camera

|                      |                      |
|----------------------|----------------------|
| Camera Resolution    | 1/3 CMOS Sensor 5MP  |
| light source         | 6pcs LED white light |
| Minimum illumination | 0.5mm F1.2105°       |
| Lens                 | 0.5mm F1.2105°       |
| Dimensons            | ø19.5x30mm           |
| Material             | Gooseneck            |

## 10.1"4K Touch Screen Recording Monitor

|                       |                                                                                                                                    |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Display               | 10.1 inch 1280 * 800 px                                                                                                            |
| Touch screen process  | Capacitive touch                                                                                                                   |
| Video recording       | 4K(16:9): 3840x2160@25 /30fps<br>2K(4:3): 2560x1944@25 /30fps<br>2K(16:9): 2560x1440@25 /30fps<br>1080p(16:9): 1920X1080@25 /30fps |
| Video format          | MP4                                                                                                                                |
| Photo                 | 12MP,8MP,4MP,2MP                                                                                                                   |
| Video Output          | HDMI 1080P                                                                                                                         |
| Compression mode      | H. 265 video compression                                                                                                           |
| Audio input/output    | 1.0Vp-p (20Hz-20KHz)                                                                                                               |
| Speaker Output        | 1W                                                                                                                                 |
| Memory card           | TF card 2GB-256GB                                                                                                                  |
| WiFi Channel          | 802.11 a/b                                                                                                                         |
| WiFi Protocol         | 2.4000-2.4835Ghz                                                                                                                   |
| WiFi power            | <16dBm                                                                                                                             |
| Power Supply          | DC 12V 2.5A                                                                                                                        |
| lithium battery       | 6500mAh( 48Wh)                                                                                                                     |
| Complete working time | 6-8 hours                                                                                                                          |
| Waterproof grade      | IP65                                                                                                                               |
| Screen size&weight    | L*W*H 30*19*1.8CM - 865g                                                                                                           |

## Pole camera

|               |              |
|---------------|--------------|
| Material      | Carbon Fiber |
| Unfold length | 5.15 meter   |
| Fold length   | 1.38 meter   |

## How to order

|              |                                                                     |
|--------------|---------------------------------------------------------------------|
| PT-Dual      | Dual camera PT360 set                                               |
| PT-CIP68W    | Camera IP68 Pan and Tilt White LED                                  |
| PT-CIP65W    | Camera IP65 Pan and Tilt White and IR light with talk back function |
| PT-CIP65IR94 | Camera IP65 Pan and Tilt Infrared 940 NM with talk back function    |
| PT-CTB       | Camera IP65 with talk back goosneck                                 |
| PT-MON       | Spare monitor 10.1" Touch-Screen display                            |
| PT-BAT       | Battery pack 55W                                                    |
| PT-VAL       | Carrying case for PT system                                         |
| PT-POLE      | Replacement carbon pole 5m                                          |
| PT-EXT100    | Extension cable 100m for PT camera                                  |

YouTube

